



# LAMB ELECTRIC

**AMETEK** 

Model: 116551-50

### **DESCRIPTION**

- Two stage
- 120 volts
- 4.8"/122 mm diameter
- Ball/sleeve bearing construction
- Single speed

Α

s

Т

M

D


Α

T A

- Peripheral bypass discharge
- Aluminum fan end bracket
- Aluminum commutator bracket

#### **DESIGN APPLICATION**

- Equipment operating in environments requiring separation of working air from motor ventilating air
- Designed to handle clean, dry, filtered air only




### **SPECIAL FEATURES**


- Suitable for 120 volt operation, 50/60 Hz
- UL recognized, category PRGY2 (E47185)
- CSA Certified, class 1611 01 (LR31393)
- Provision for grounding
- Skeleton frame design
- The Lamb vacuum motor line offers a wide range of performance levels to meet design needs

### **TYPICAL MOTOR PERFORMANCE.\***

(At 120 volts, 60Hz, test data is corrected to standard conditions of 29.92 Hg, 68° F.)



Orifice	Amps	Watts	RPM	Vac	Flow	Air
(Inches)		(In)		(In.H2O)	(CFM)	Watts
2.000	6.9	781	19390	2.8	87.7	29
1.750	6.8	770	19140	9140 4.6 85.6		46
1.500	6.9	786	19180	7.9	81.8	76
1.250	6.9	789	19140	19140 14.4 76.7		130
1.125	6.9	786	19115	9115 19.0 71.4		160
1.000	6.9	783	19225	25.3	64.7	193
0.875	6.7	765	19405	32.2	55.6	211
0.750	6.6	747	19990	40.1	45.4	214
0.625	6.1	701	20685	47.0	34.0	188
0.500	5.7	654	21625	53.5	23.1	145
0.375	5.2	604	22755	60.7	14.0	100
0.250	4.8	558	23785	67.0	6.9	54
0.000	4.5	524	24770	76.5	0.0	0

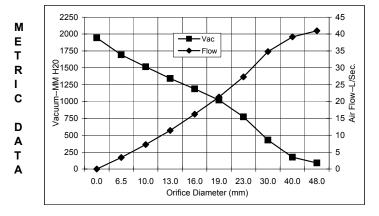

Orifice	Amps	Watts	RPM	Vac	Flow	Air
(mm)		(In)		(mm H2O)	(L/Sec)	Watts
48.0	6.8	776	19280	91	41.0	36
40.0	6.9	781	19168 19126 19360	175 430 774	39.1 34.8 27.3	67 147 207
30.0	6.9	787				
23.0	6.8	770				
19.0	6.5	746	20004	1022	21.3	213
16.0	6.1	703	20657 1187 21531 1342	1187	16.3	189
13.0	5.7	659		11.4	149	
10.0	5.3	612	22586	1514	7.3	107
6.5	4.9	560	23734	1694	3.4	56
0.0	4.5	524	24770	1943	0.0	0

Note: Metric performance data is calculated from the ASTM data above.

<sup>\*</sup> Data represents performance of a typical motor sampled from a large production quantity. Individual motor data may vary to normal manufacturing variations.

Test Specs:	120 volts	Minimum Sealed Vacuum:	65.0"	ORIFICE:	7/8"	Minimum Vacuum:	30.0"	Maximum Watts:	870

PRODUCT BULLETIN 116551-50

## DIMENSIONS TI. LEADS: 18GA STRANDED, LEADS CAN BE ANY COLOR EXCEPT GREEN OR GREEN WITH YELLOW STRIPE. 2. GROUNDING OR EARTHING PROVISIONS: USE HOLES AS INDICATED FOR GROUNDING OR EARTHING. REFER TO APPROPRIATE LISTING OR REGULATORY AGENCY FOR PROPER METHOD OF GROUNDING OR EARTHING. MANUFACTURERS NAME, VOLTAGE AND 60HZ (OPTIONAL LOCATION) ø123.31±0.38 60.20±1.27 355.60±25.40 ø4.855±.015 14.00±1.00 2.370±.050 (2X) (2X) ø121.66 MODEL NO. ø4.79 ø79.12±0.25 13.49±2.54 .531±.100 ø 3.115±.010 (2X) VACUUM INTAKE AIR INTAKE ø128.78±1.52 ø5.070±.060 MOUNTING MUST NOT RESTRICT 2.79 11 50.75±0.51 1.998±.020 THIS Ø MANUFACTURERS NAME, VOLTAGE 85.06±1.78 68.02±1.02 2.678±.040 3.349±.070 10-32(TYPE 23) — THREAD CUTTING SCREW RECOMMENDED (2 PLACES) (SEE NOTE 2) DATE OF MANUFACTURE AND INSPECTION CODE WITH "F" SUFFIX

**IMPORTANT NOTE:** Pictorial and dimensional data are subject to change without notice. Contact factory for current revision levels.

WARNING -When using AMETEK/Lamb Electric bypass motors in machines that come in contact with foam, liquid (including water) or other foreign substances, the machine must be designed and constructed to prevent those substances from reaching the fan system, motor housing and electrical components. Lamb vacuum motors other than hazardous duty models should not be applied in machines that come in contact with dry chemicals or other volatile materials. Failure to observe these precautions could cause flashing (depending on volatility) or electrical shock which could result in property damage and severe bodily injury, including death in extreme cases. All applications incorporating Lamb motors should be submitted to appropriate organizations or agencies for testing specifically related to the safety of your equipment.

AMETEK/Lamb Electric Division 627 Lake Street Kent, Ohio 44240 U.S.A. Tel: (330) 673-3451

Fax: (330) 673-8994

**Ametek GmbH** P. O. Box 1251 D-71667 Marbach Germany

Phone: + 49-714-484-9512 + 49-714-484-9513 Fax:

**AMETEK/Singapore Private Limited** 10 Ang Mo Kio Street 65 # 05-12 Techpoint Singapore 2056 Tel: + 65-484-2388

Fax: + 65-481-6588

Issued: October, 1997